

Tier1

BloombergNEF



ISO 9001 ISO 14001 SA 8000
ISO 45001 OHSAS 18001



M10 TOPCON MONO


SPxxx-N144M10

555~585W


- Silver frame
- Black frame
- Full black

15 Yr quality guarantee | 30 Yr power warranty

■ SUNPRO TOPCon module (Additional value from 30-year warranty)
 □ Common module

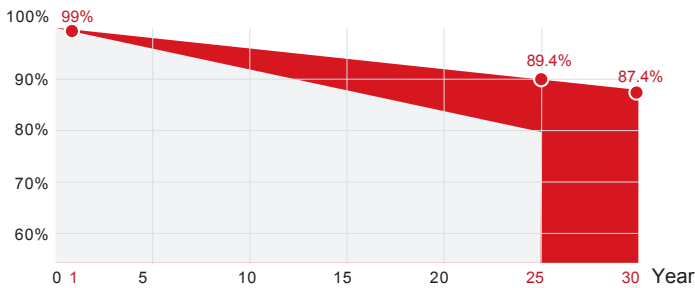

*SUNPRO Standard tiered warranty

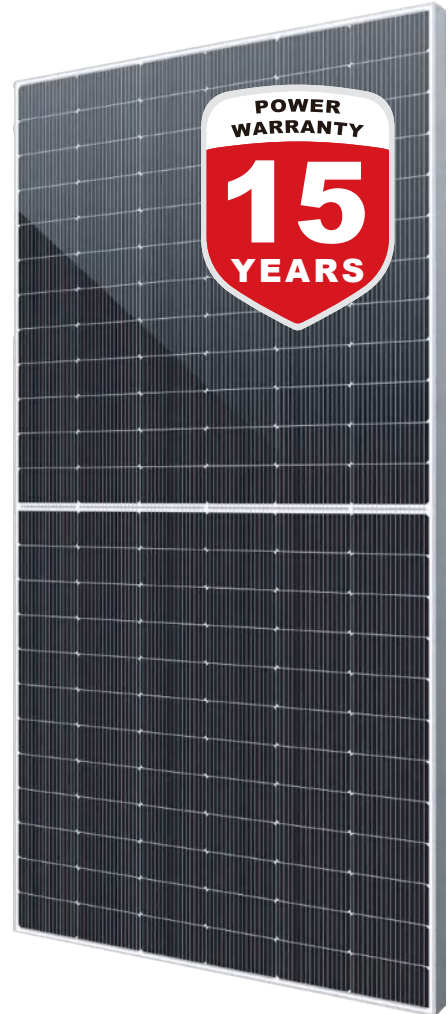

WARRANTY & GUARANTEE

Linear output power guarantee
25 years: 89.4% power output
30 years: 87.4% power output

WITHSTAND STRONG

Snow load 5400Pa
Wind load 2400Pa

PID RESISTANCE

Power positive tolerance 0~+3%.
The attenuation probability of PID phenomenon is minimized through battery production technology optimization and material control

R&D AND PRODUCTION

Advanced production line. The leading solar cell cutting process and multi busbar design with SUNPRO Technology.

HIGH EFFICIENCY


N-type, Components have better reliability and lower LID/LETID attenuation. Efficiency can reach 22.64%. Excellent low light performance. Higher power output under the conditions of haze, overcast, etc.

Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature 25°C)


Typical type

	555W	560W	565W	570W	575W	580W	585W
Max power(Pmax)	555	560	565	570	575	580	585
Max power voltage(Vmp)	41.86	41.99	42.13	42.26	42.41	42.56	42.72
Max power current(Imp)	13.26	13.34	13.41	13.49	13.56	13.63	13.7
Open circuit voltage(Voc)	50.7	50.84	50.98	51.13	51.28	51.43	51.58
Short circuit current(Isc)	14.01	14.07	14.13	14.2	14.27	14.34	14.41
Module Efficiency(%)	21.48	21.67	21.86	22.06	22.25	22.44	22.64
Max system voltage	DC 1500V (TÜV, UL)						
Maximum Series Fuse Rating	25A						

DIMENSIONS AND STRUCTURE

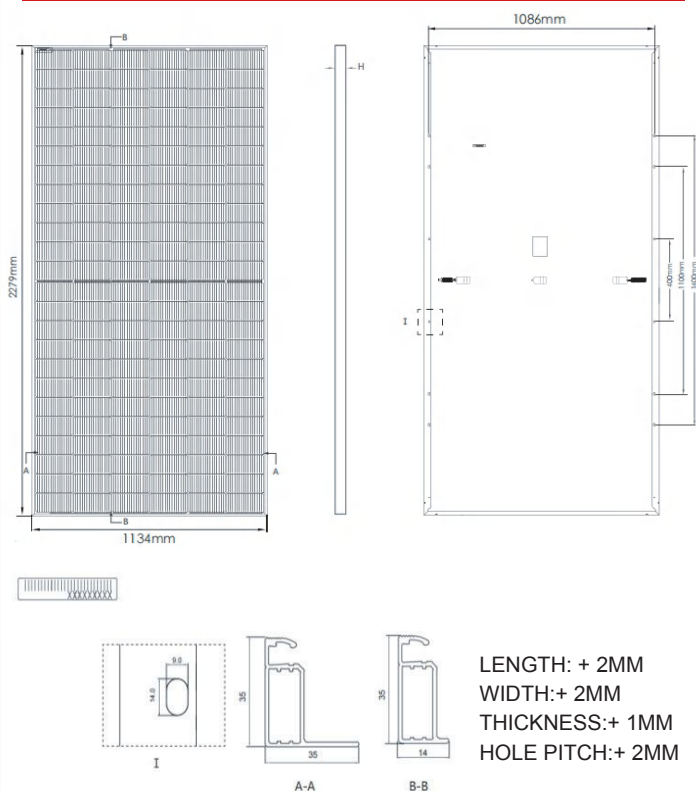

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

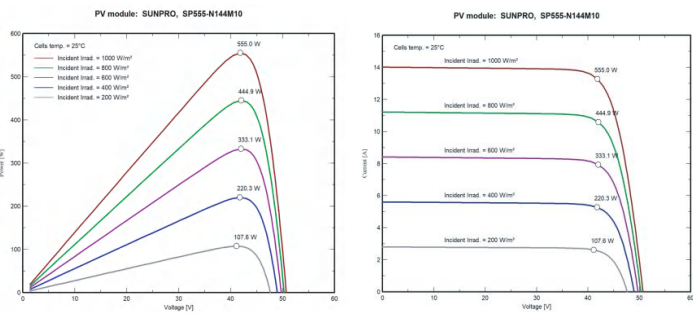

Electrical parameters at NMOT test conditions

(Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s)

Typical type	555W	560W	565W	570W	575W	580W	585W
Max power(Pmax)	417	421	425	429	433	437	437
Max power voltage(Vmp)	39.3	39.5	39.7	39.7	39.9	40.1	39.9
Max power current(Imp)	10.62	10.67	10.72	10.79	10.85	10.90	10.96
Open circuit voltage(Voc)	47.7	47.9	48.1	48.2	48.4	48.5	48.3
Short circuit current(Isc)	11.29	11.34	11.39	11.44	11.50	11.56	11.61

Mechanical Data

Dimensions	2279x1134x35mm
Weight	29kg
Glass	3.2mm ultra clear embossed tempered coated glass
Output cables	4mm ² , symmetrical lengths 1300mm
Connectors	MC4 compatible IP68
Cell type	N type Mono-Crystalline, 182x91mm
Number of cells	144cells (Half-Cell)

Temperature Characteristics

Packing Configuration

Temp.Coeff.of Isc(TK Isc)	0.046%/°C	Container	40'GP
Temp.Coeff.of Voc(TK Voc)	-0.25%/°C	Pieces per pallet	62
Temp.Coeff.of Pmax(TK Pmax)	-0.30%/°C	Pallets per container	10
Operating temperature	-40~+85°C	Pieces per container	620
Normal operating cell temperature	45±2°C		

Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TÜV, CE, CEC, WEEE
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+3%
Junction box	IP 68
Warranties	15 years product warranty and 30 years 87.4% of power